

SpectralLED® RS-7-3-VIS Tunable Light Source - Fiber Optic Output




The SpectralLED® Fiber Optic Output configuration provides flexible illumination for applications where space is limited. Systems can be configured with multiple outputs enabling several devices to be simultaneously illuminated at different working locations. Collimating optics are included at the fiber distal end, and custom fiber diameters and lengths are available.

The SpectralLED® Tunable Light Source incorporates up to 35 discrete wavelengths for synthesis of commercially available light sources or based on spectra that you import. The platform is easily adaptable for automated test systems and production line integration, with integrated optical feedback and temperature control to ensure rock-solid stability and consistent results.

Unprecedented Resolution and Accuracy For Camera & Image Sensor Calibration

- Wavelength Options From the UVA to the Near Infrared
- Quickly Simulate any CIE Illuminant or Macbeth™ / X-RITE™ Color Patch
- Built-in RMS Spectral Fitting for Simulation of User Imported Spectra
- Constant Current Drivers & Built-in Optical Feedback Ensure Accurate & Flicker-free Output in Real Time
- All Solid-State Design for Rapid Start-up, Repeatable Performance and Long Operating Lifetime
- ISO/IEC 17025 Accredited by NVLAP (NVLAP lab code 200823-0) for Calibration Accuracy

Fiber Outputs	Fiber Length	Fiber Diameter
4	1.5 m	6.35 mm
[Most systems are custom configured – please consult factory]		

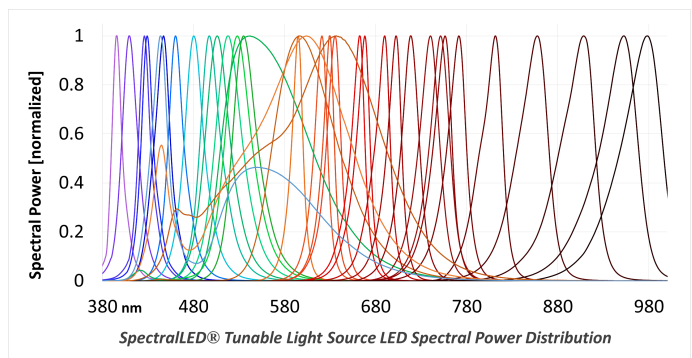

**Measurement
Applications**

- White Balance
- Quantum Efficiency
- Spatial Non-uniformity
- Pixel Defects
- Crosstalk
- Vignetting Correction
- Sensitivity
- Responsivity
- Signal to noise
- Linearity
- ISO Speed
- Saturation Exposure
- Dynamic range

Gamma Scientific is ISO/IEC 17025 accredited by NVLAP (NVLAP lab code 200823-0) and performs LM-79 / LM-80 LED testing.



RS-7-3-VIS SPECIFICATIONS	
Optical Geometry	Typically 0.55 NA (fiber dependent)
Spatial Uniformity	Typically > 70% (fiber dependent)
Radiance Range	Up to 500 $\mu\text{W}/\text{cm}^2$ (at 5cm, fiber and spectrum dependent)
Luminance Range	Up to 1,000 lux (fiber and spectrum dependent)
OPTICAL SPECIFICATIONS	
Spectral Range	380 nm to 1,000 nm (Custom ranges are available on request, including SWIR options)
Spectral Output	32 discrete LED channels + 3 broadband LED Channels Visible resolution ~ 15 nm, NIR resolution ~ 50 nm (typical channel spacing)
Spectral Peaks	395nm, 405nm, 420nm, 430nm, 450nm, 460nm, 475nm, 495nm, 505nm, 520nm, 525nm, 535nm, 570nm, 595nm, 610nm, 700nm, 620nm, 630nm, 637nm, 660nm, 675nm, 685nm, 715nm, 730nm, 750nm, 760nm, 780nm, 805nm, 850nm, 895nm, 940nm, 965nm 2,700K Warm White, 3,000K Warm White, 6,500K Cool White (Custom configurations available)
Spectral Bandwidth	Typical: Visible 20nm FWHM, NIR 50nm FWHM
CCT Range	1,900K to 40,000K
Preset Spectra	CIE Illuminants A, B, C, D50, D55, D65, D75, E, F1-F12, Macbeth™ / X-Rite™ Color Patches
Custom Preset Spectra	Configurable at time of order via API. Contact factory for details
ACCURACY SPECIFICATIONS	
Illumination Stability	$\geq 99.99\%$ after 50 ms for radiance or after 2,000 ms for color
Illumination Accuracy	$\pm 1\%$ Absolute, NIST traceable
Spectral Accuracy	± 1 nm centroid wavelength
Color Accuracy	CIE 1931 x, y ± 0.003
Linearity	< 1 % RMS of full scale
Temperature Stability	Within $\pm 1^\circ\text{C}$ via active TEC
Long-term Drift	Output $\leq 2\%$ Spectral ≤ 1 nm (channel dependent)
ELECTRICAL SPECIFICATIONS	
Electrical Resolution	16 bit DAC for channel current drivers 24 bit ADC for internal radiance monitor feedback
Dynamic Range Adjustment	4-5 decades typical (spectrum dependent)
LED Control	Pure DC constant current with floating differential sensing
GENERAL SPECIFICATIONS	
Software	Firmware includes full spectral calibration with spectral fitting, preset storage, real-time optical feedback, radiometric and photometric units supported
Interface Connectors	USB 2.0 type B and DB-9
Interface Protocol	Simple ASCII commands with optional binary block transfer
Supported Operating Systems	USB drivers for Windows, OSX and Linux via FTDI virtual COM port Legacy RS-232 serial port for integration (no OS required)
Input Voltage and Power	110 to 240 VAC at 50-60Hz, 600W maximum
Dimensions	Height 405mm (16 in), Width 460mm (18.1in), Depth (305mm (12in). Weight 17.5 kg (38.6 lbs)
UPGRADES	
RS-7 Wavemon	Multi-channel photodiode system provides amplitude feedback & real-time wavelength measurements

Specifications are subject to change without notice