

PGT® 120 PERSONNEL GROUNDING TESTER


The Personnel Grounding Tester PGT®120 is a wrist strap and footwear tester for access control of ESD protected areas (EPA's)

- The test result is indicated with audible and visual signals. A relay with a dry contact provides the connection to a door opening system
- Power supply: Internal battery or external power supply unit
- Wrist strap, right and left shoe testing is simultaneously possible by separate measuring circuits
- In combination with a barrier gate, the footwear measurement can be performed in series without pressing a button (hands-free mode).
- Separate measurement of left and right shoe
- Lower limit disabling is possible
- The unit can be used on bench tops or as a wall mounted unit (Wall mounting requires an additional wall mounting plate)
- Adjustable limits through dip switches

Includes:

PGT 120 unit, footwear testing electrode, user's manual in English and German, Calibration Certificate, 9 volt battery and 230 VAC power supply

IEC
EN

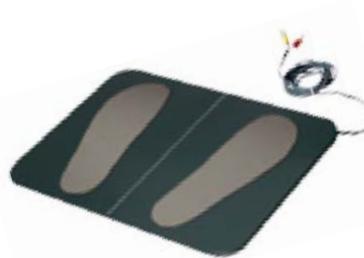

Footwear electrode for separate shoe testing
Dimension: 350 x 500 mm




Product link



Part Nr.

7100.PGT120	Personnel Grounding Tester PGT®120
7100.PGT120.WK	Wall mounting plate for PGT®120 and PGT® 120.COM (not shown)
7100.PGT120.CU	Calibration unit for PGT® 120.COM
7100.PGT120.SM	Mat for footwear electrode with yellow bevelled edges

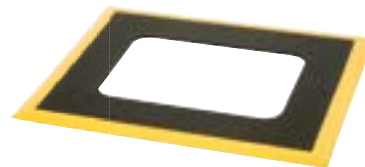

Mat for footwear electrode
Dimension: 830 x 680 x 13 mm



Calibration Unit for PGT®120

When the PGT®120 is operated in the "hands-free mode", the measurement is performed in series through the shoes without touching the contact electrode on the PGT120 unit